
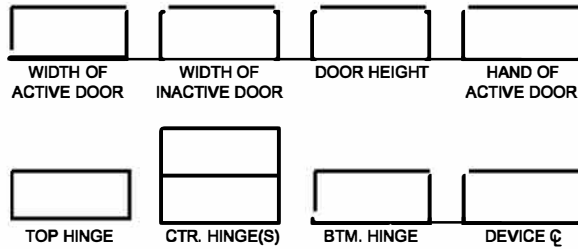


- HEAVY DUTY
- EXTREME DUTY
- FIRE RATED
- 20 MIN  30 MIN  45 MIN
- 60 MIN  90 MIN
- WIND LOAD RATED
- DESIGN PRESSURE \_\_\_\_\_ PSF.

**COLOR**

- POLAR WHITE
- CASHEW TAN
- MIST GRAY
- PRIMER
- OTHER \_\_\_\_\_

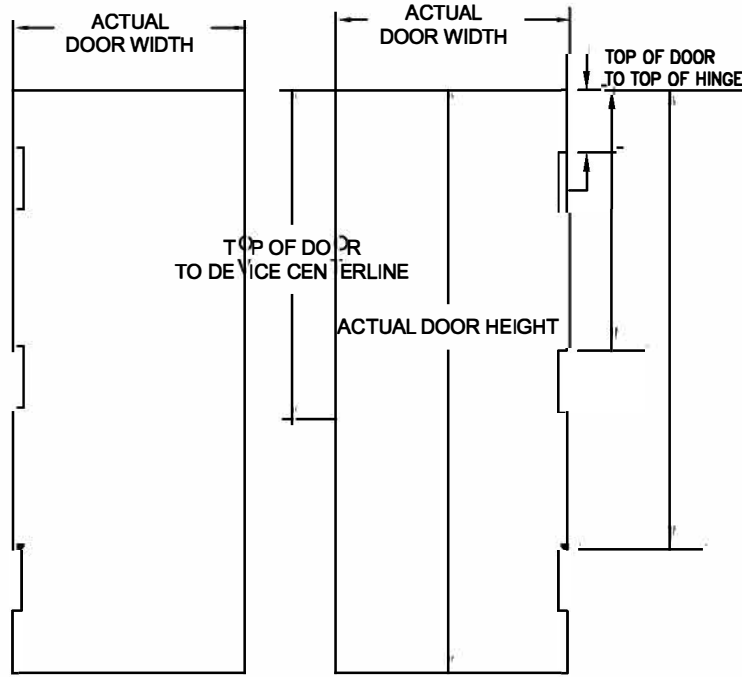


PLEASE ALLOW MINIMUM 1/8" GAP AT HINGE EDGES AND MEETING STILE

**HARDWARE PREPARATIONS & REINFORCEMENTS**

- 4-1/2" MORTISE HINGES
  - 3  4  5
- 5" MORTISE HINGES
  - 3  4  5
- CONTINUOUS HINGE REIN.\*
- CYLINDRICAL 161 LOCK
- CYLINDRICAL DEADBOLT
- MORTISE DEADLOCK\*
- MORTISE 86 LOCK
- MORTISE EXIT DEVICE
- RIM EXIT DEVICE
- SVR EXIT DEVICE
- CVR EXIT DEVICE \*
- CLOSER REIN.
- PUSH/PULL PLATES REIN.
- SURFACE OH HOLDER/STOP REIN.
- CONCEALED OH HOLDER/STOP\*
- SURFACE DOOR BOTTOM REIN.
- CONCEALED DOOR BOTTOM \*
- MANUAL FLUSH BOLTS
- AUTOMATIC FLUSH BOLTS \* (wood type for UL rated)
- FRP ASTRAGAL
  - Installed on INA leaf STD
- OTHER \*

\*MAKE & MODEL REQUIRED



**STANDARD 1/4" GLASS SIZES:**

- 8 x 30 (6-1/2 x 28-1/2 VISIBLE)
- 12 x 12 (10-1/2 x 10-1/2 VISIBLE)
- 24 x 24 (22-1/2 x 22-1/2 VISIBLE)
- 24 x 30 (22-1/2 x 28-1/2 VISIBLE)

**GLAZING TYPE AND THICKNESS:**

- 1/4" TEMPERED
- 1/4" WIRE
- 1/4" LEXAN
- CUTOUT ONLY (NO KIT)
- OTHER \_\_\_\_\_



**CUSTOM SIZES:**

- VISIBLE WIDTH \_\_\_\_\_
- VISIBLE HEIGHT \_\_\_\_\_
- TOP TO VISIBLE \_\_\_\_\_
- EDGE TO VISIBLE \_\_\_\_\_
- CENTER HORIZONTALLY

**GLAZING:**

- BY ELIASON
- BY OTHERS
- ACTIVE LEAF
- INACTIVE LEAF

**VISION LIGHT**

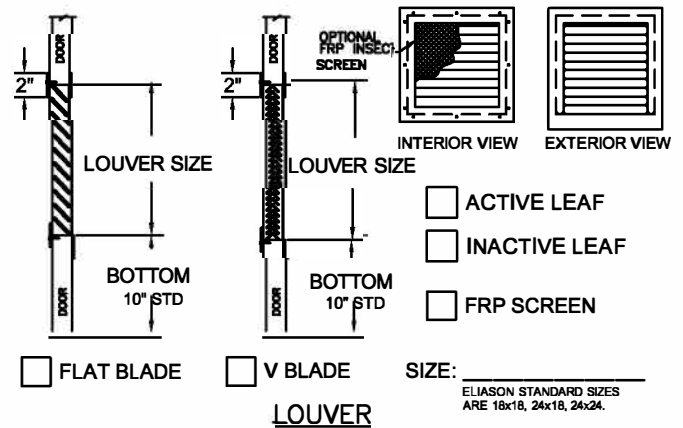

- ACTIVE LEAF
- INACTIVE LEAF
- FRP SCREEN

SIZE: \_\_\_\_\_  
ELIASON STANDARD SIZES ARE 18x18, 24x18, 24x24.

CUSTOMER NOTES: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

**DOUBLE DOORS ONLY**

CUSTOMER: \_\_\_\_\_  
PROJECT: \_\_\_\_\_  
DOOR MARK: \_\_\_\_\_



800.828.3655