
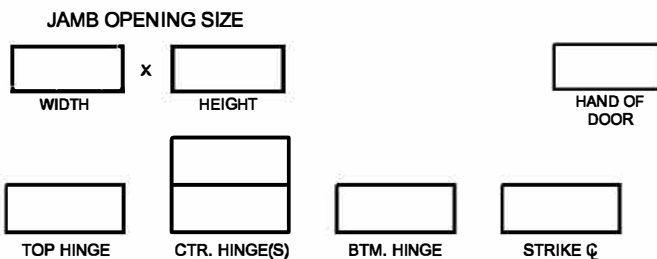


- HEAVY DUTY
- EXTREME DUTY
- FIRE RATED
- 20 MIN 30 MIN 45 MIN
- 60 MIN 90 MIN
- WIND LOAD RATED
- DESIGN PRESSURE _____ PSF

COLOR

- POLAR WHITE
- CASHEW TAN
- MIST GRAY
- PRIMER
- OTHER _____





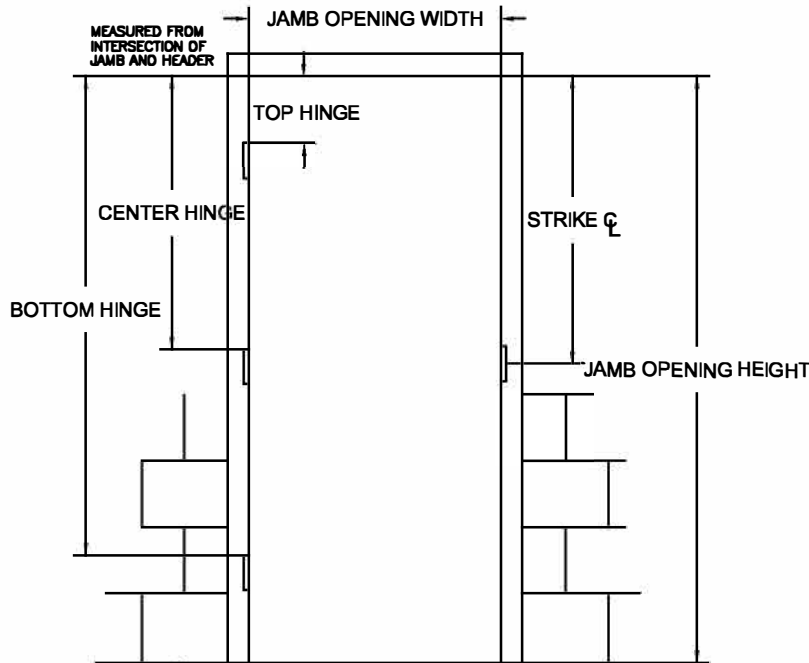


ROUGH OPENING:
OVERALL FRAME PLUS 1/4" ALL AROUND TO ALLOW FOR FRAME SHIMS.

HARDWARE PREPARATIONS

- 4-1/2" MORTISE HINGES
 - 3 4 5
- 5" MORTISE HINGES
 - 3 4 5
- CONTINUOUS HINGE REIN. *
- 4-7/8" ANSI STRIKE
- DEADBOLT STRIKE *
- RIM SURFACE STRIKE REIN
- CLOSER REIN.
- SURFACE OH HOLDER/STOP REIN.
- CONCEALED OH HOLDER/STOP *
- OTHER *

*MAKE & MODEL REQUIRED

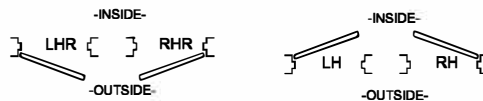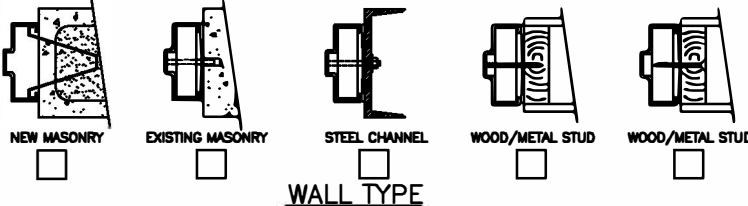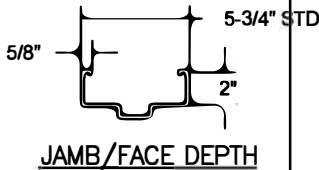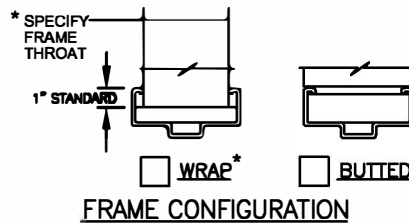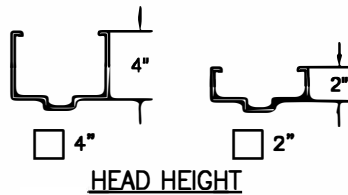

800.828.3655

CUSTOMER NOTES: _____

SINGLE FRAME ONLY

CUSTOMER: _____
 PROJECT: _____
 DOOR MARK: _____