

# SPEC SHEET EISA-10

Quote/Order# \_\_\_\_\_


Company Name: \_\_\_\_\_

Attention: \_\_\_\_\_

Email: \_\_\_\_\_

Phone#: \_\_\_\_\_

Job Name: \_\_\_\_\_

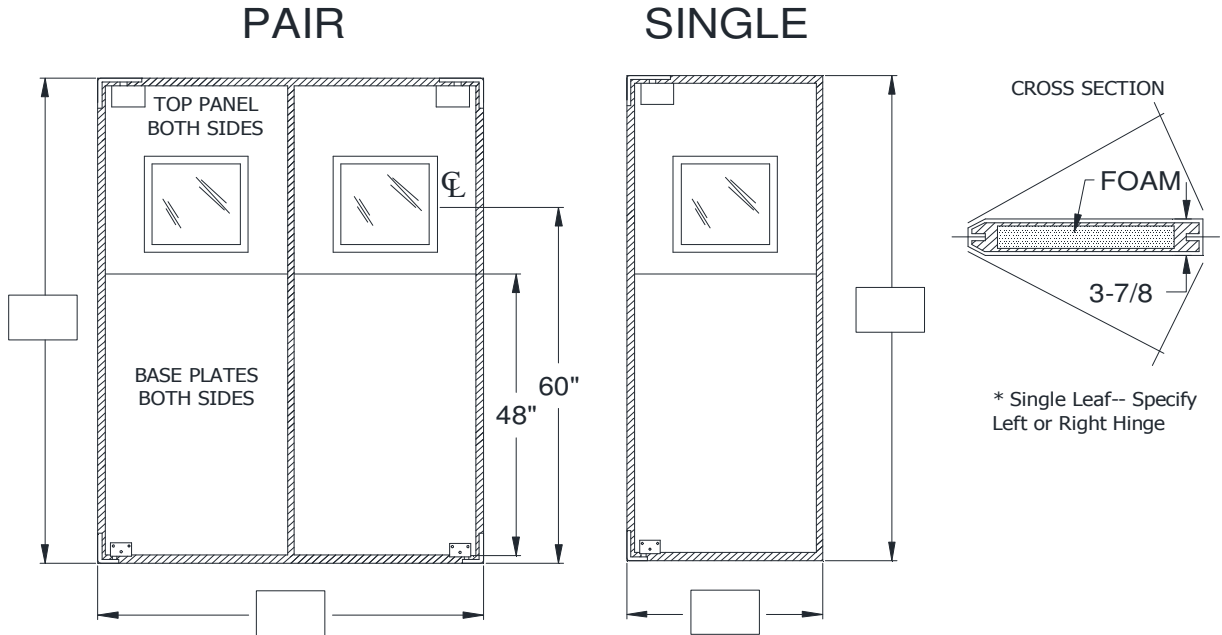

**Fill in Opening Size in the Blanks Provided Above**

**STANDARD SPECIFICATIONS:** Door body 3-7/8" with 3-1/2" foam core and R value of 25, to comply with the 2007 Energy Independence and Security Act. Full perimeter seal gasket, metal clad. 48" high stainless steel base plates, both sides. 0.032" tempered aluminum alloy with satin anodized finish top panels, both sides. 14" x 14" triple pane, gas filled window set in aluminum frame. Door assembly includes the original "NO SPRING" Easy Swing® hinges and both 1/4" - 20 x 1" thread cutting screws and #14 -1-1/2" sheet metal/wood screws for jamb by others.

**INSTALLATION DETAILS:** Jambs must be plumb and square. Minimum double 2 x 4 inch wood construction or equivalent. Hollow metal jambs should be reinforced at hinge locations.

**SPECIFIC DETAILS FOR DOOR CONSTRUCTION:**

JAMB GUARD: [ ] 5" X 18"

WINDOW: [ ] Standard 14" X 14" In Aluminum Frame, Up 60" to Center of Window from Floor  
 [ ] Other: \_\_\_\_\_

PLATE: Height: [ ] Standard 48" Height [ ] Other Height: \_\_\_\_\_  
 Color/Material: [ ] Standard Stainless Steel [ ] Galvanized Steel [ ] Black ABS  
 [ ] Other: \_\_\_\_\_

BUMPER: Standard Black Tear Drop Polyethylene, Height: [ ] 12 [ ] 18 [ ] 24 [ ] 30 [ ] 36 [ ] 42  
 Aluminum Bumper Strip: [ ]

OTHER SPECIFICATIONS: \_\_\_\_\_

APPROVED BY: \_\_\_\_\_

DATE: \_\_\_\_\_