

SPEC SHEET EISA-20

Quote/Order# _____

Company Name: _____

Attention: _____


Email: _____

Phone#: _____

Job Name: _____

PAIR

SINGLE

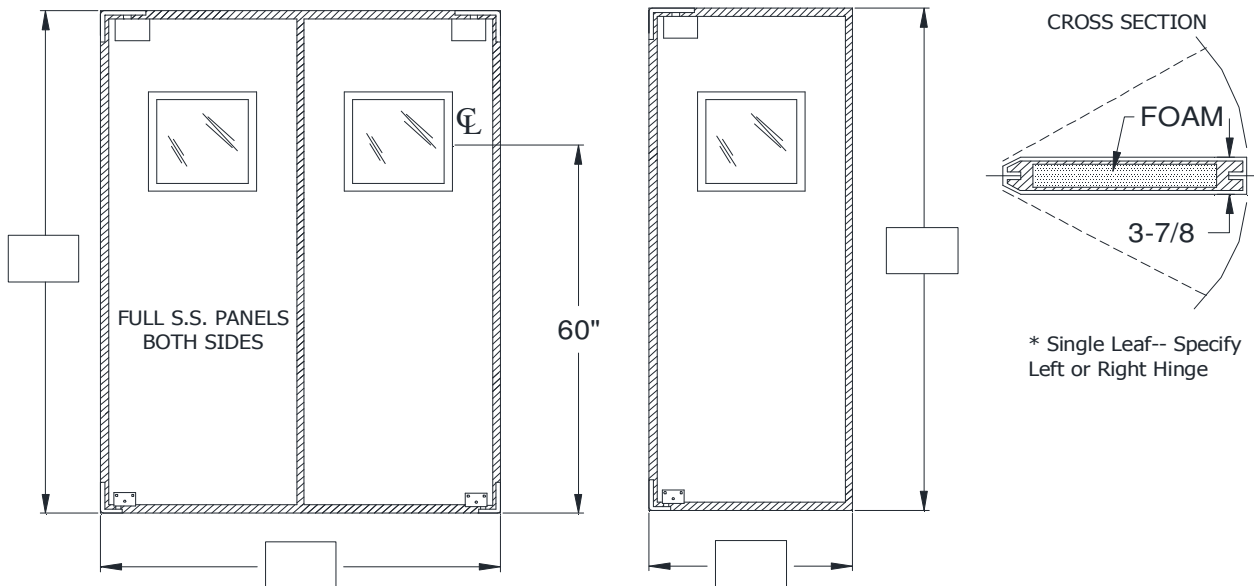

Fill in Opening Size in the Blanks Provided Above

STANDARD SPECIFICATIONS: Door body 3-7/8" with 3-1/2" foam core and R value of 25, to comply with the 2007 Energy Independence and Security Act. Full perimeter seal gasket, metal clad. Full height stainless steel panels both sides. 14" x 14" triple pane, gas filled window set in brushed nickel frame. Door assembly includes the original "NO SPRING" Easy Swing® hinges and both 1/4" - 20 x 1" thread cutting screws and #14 -1-1/2" sheet metal/wood screws for jamb by others.

INSTALLATION DETAILS: Jambs must be plumb and square. Minimum double 2 x 4 inch wood construction or equivalent. Hollow metal jambs should be reinforced at hinge locations.

SPECIFIC DETAILS FOR DOOR CONSTRUCTION:

JAMB GUARD: 5" X 18"

WINDOW: Standard 14" X 14" In Aluminum Frame, Up 60" to Center of Window from Floor
 Other: _____

PLATE: Specify Height: _____
 Color/Material: Stainless Steel Galvanized Steel Black ABS
 Other: _____

BUMPER: Standard Black Tear Drop Polyethylene, Height: 12 18 24 30 36 42
 Aluminum Bumper Strip:

OTHER SPECIFICATIONS: _____

APPROVED BY: _____

DATE: _____

