


# INSTALLATION INSTRUCTIONS & PART DIAGRAM

## Eliason® *Easy Swing*® Double Action Doors

### EISA COOLER DOOR

JAMB MUST BE SQUARE AND PLUMB  
A MINIMUM OF 3-1/2 INCH WIDE JAMBS  
REQUIRED TO MOUNT HARDWARE

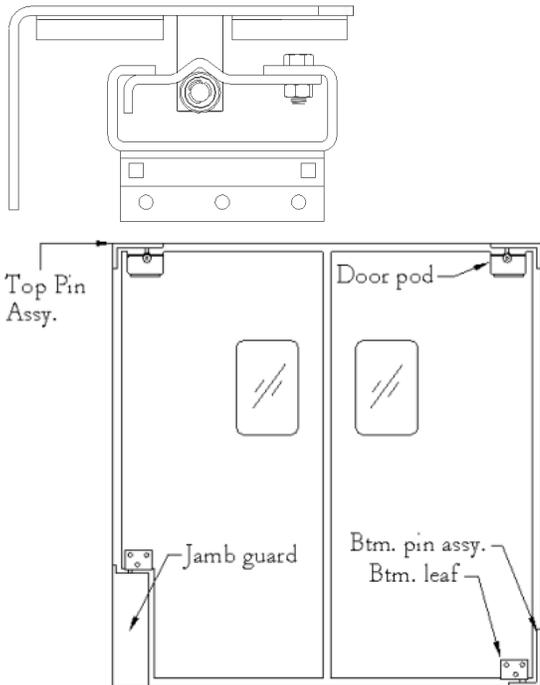

NOTE: Bottom pin assembly must be secured to floor.

1. Measure width and height of framed opening and compare width dimensions given at time of ordering. (This model was cut to the dimensions given by the customer and is not adaptable to fit into a different size opening.)
2. Position bottom pin assembly on floor and center on side jamb. Secure to jamb using (4) 1-1/2" screws supplied. Bottom pin must be secured to floor using (2) 3/8" X 3" floor anchors supplied. (Drill a 3/8" hole 3-1/2" deep to allow the thread tapping dust to settle and then blow clean using compressed air. Insert the 3/8" x 3" anchor bolt through hole in the bottom pin and into the drilled hole. Using a 9/16" wrench, tighten the anchor into the base until the hex washer head makes contact.) Top pin assembly secures to top with (4) screws and side jamb with (2) screws supplied.
3. If a jamb guard is supplied, refer to the installation instructions supplied with the jamb guard.
4. Slip door over bottom pin and lift slightly to slide door pod over bearing plate. Line up holes and insert bolts supplied. Partially install lock nuts, move door to closed position and secure lock nuts.
5. Install covers and secure (4) 1/2" screws supplied per door.

#### 150-65 - Top Pin Assy

- (6) 1/4" - 20 x 1" phil. flt hd. thread cutting screws
- (6) #14 - 1-1/2" phil. flt hd. sheet metal / wood screws

100-50 - Bearing Plate with (2) 5/16 - 18 screws, (2) 5/16 - 18 lock nuts

170-58 - 3/8" Axle

170-60 - (2) Rollers


170-28 - (2) Kliprings

100-1105 - (2) Aluminum Covers, (4) screws (SCP-2,4,5,7;SCG/FCG)

OR  
 100-1105SS - (2) SS Covers, (4) screws (SCP-2,4,5,7;SCG/FCG)

OR  
 170-182XX - (2) ABS Covers, (4) screws (HCP/G, HFG, PMP,P11+)

150-64 - Bottom Pin Assy (4) of each fastener listed under 150-65 & (2) floor anchors (150-64 **NOT** included if jamb guards are used)

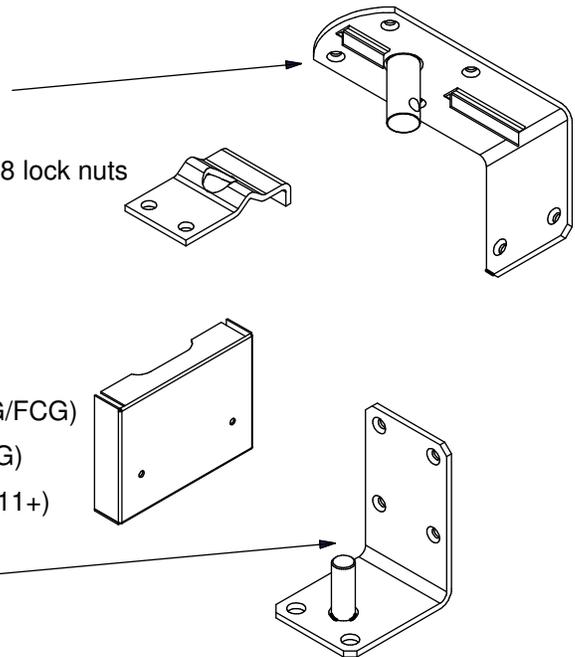

**ELIASON**  
 CORPORATION

www.eliasoncorp.com  
 9229 Shaver rd., Kalamazoo, MI 49003  
 Telephone: 269-327-7003 / 800-828-3655  
 Fax: 269-327-7006 / 800-828-3577  
 E-mail: doors@eliasoncorp.com