

# SPEC SHEET FX9000

Quote/Order# \_\_\_\_\_


Company Name: \_\_\_\_\_

Attention: \_\_\_\_\_

Email: \_\_\_\_\_

Phone#: \_\_\_\_\_

Job Name: \_\_\_\_\_

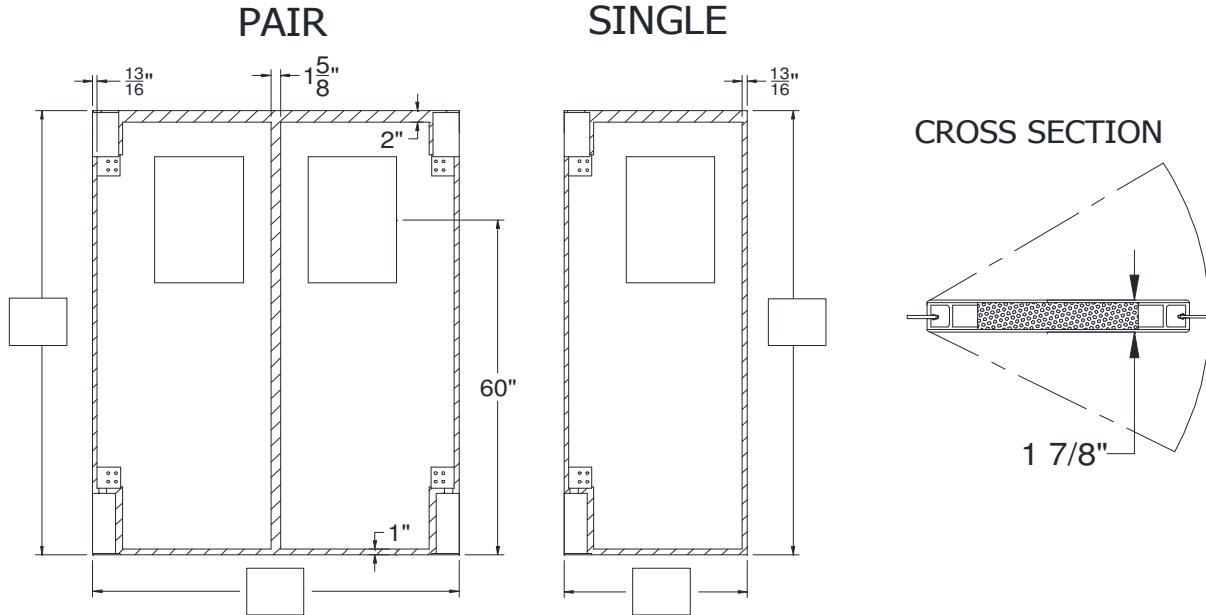

**Fill in Opening Size in the Blanks Provided Above**

**SPECIFICATIONS:** Door body 1-7/8" thick with high impact, thermoplastic exterior with a foam core and full perimeter internal steel reinforcement, extra reinforcement used at corners. Provided with full perimeter seal, USDA accepted. Clear polycarbonate window set in black internal window frame (Window size determined by door size). Door Assembly includes V-Cam hinges and lower hinge guard.

**INSTALLATION DETAILS:** Jambs must be plumb and square. Minimum double 2 x 4 inch wood construction or equivalent. Hollow metal jambs should be reinforced at hinge locations.

**SPECIFIC DETAILS FOR DOOR CONSTRUCTION:**

DOOR COLOR: [ ] Forest Green [ ] Cadet Blue [ ] White [ ] Metallic Gray [ ] Cloud Gray [ ] Antique White  
 [ ] Chocolate Brown [ ] Red [ ] Medium Brown [ ] Royal Blue [ ] Navy [ ] Black [ ] Beige  
 [ ] Off White [ ] Fudge Brown [ ] Gray

JAMB GUARD: [ ] 11" Polyethylene [ ] 11" Polyethylene With Floor Plate [ ] 6" Polyethylene  
 [ ] 11" Aluminum [ ] 11" Aluminum With Floor Plate [ ] 6" Aluminum  
 [ ] 11" Aluminum 90X180 [ ] 11" Aluminum 90X180 With Spring Assist  
 [ ] 8 1/4" Standard With Pillow Block [ ] 10 7/8" Industrial With Pillow Block

PLATE: Specify Height: \_\_\_\_\_  
 Color/Material: [ ] Stainless Steel [ ] Galvanized Steel [ ] Black ABS [ ] Other \_\_\_\_\_

BUMPER: Standard Black Tear Drop Polyethylene, Height: [ ] 12 [ ] 18 [ ] 24 [ ] 30 [ ] 36 [ ] 42  
 Aluminum Bumper Strip: [ ]

OTHER SPECIFICATIONS: \_\_\_\_\_

**APPROVED BY:** \_\_\_\_\_

**DATE:** \_\_\_\_\_

**Eliason Corporation**