

THE ELIASON® EISA-30 INSULATED COOLER DOOR

Keep your Cool with the EISA-30 “R-25” Insulated Cooler Door from Eliason.



THE ELIASON® EISA-30 INSULATED COOLER DOOR

The EISA-30 double-acting cooler door from Eliason maximizes energy efficiency and meets all requirements of the federal EISA mandate, so you won't "lose your cool". The 3.75" thick monolithic door panel is rotationally molded with an outer skin thickness of .125" and the core is foamed-in-place with CFC-free urethane foam, which provides an R-Value of 25. This attractive and durable door panel operates on the time-tested Eliason Easy Swing® hinge system, which is easy to install, requires virtually no maintenance. Available with a variety of options such as Easy Spring bumpers, jamb guards and push plates, this door will be sure to fit perfectly in your application. Common applications for the EISA-30 include supermarkets, restaurants and coolers. The EISA-30 is able to stand up to different types of traffic such as pallet jack, push cart and pedestrian.




ELIASON®

EISA-30 Insulated Cooler Door

product features
& specifications

Cool Features, Energy Savings and Real Value.

- This exceptional double-acting traffic door maximizes efficiency and traffic flow, while minimizing the loss of refrigerated air as coolers are accessed for loading and unloading.
- Eliason EISA-30 Cooler Doors are 3-3/4" thick and meet the requirements of the 2007 Energy Independence and Security Act.
- Eliason EISA-30 Doors are custom manufactured to fit your particular opening size and application.
- Like all Eliason Doors, the EISA-30 is built to last, incorporating an outer surface of .125" thick rotationally molded polyethylene, making it moisture resistant and one of the toughest doors on the market.
- The EISA-30 operates on the Easy Swing Hinge System pioneered by Eliason more than thirty years ago and still the smoothest-operating and most reliable hinge system on the market today.

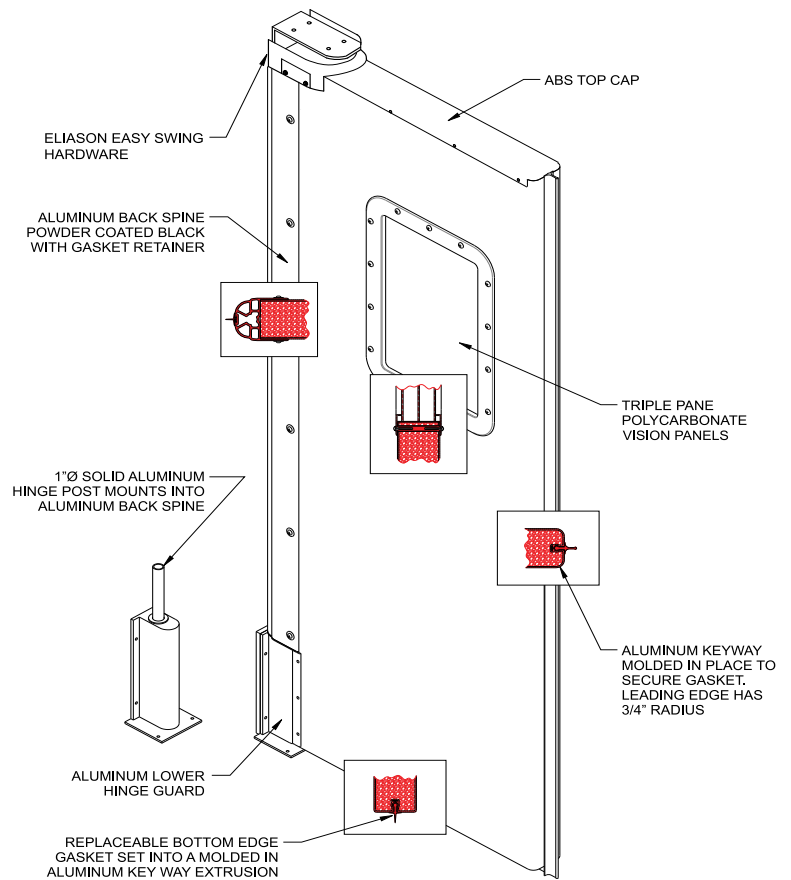

Specifications

DOOR BODY: The 3.75" thick monolithic door panel is rotationally molded with an outer skin thickness of .125" and the core is foamed-in-place with CFC-Free urethane foam, which provides an R-Value of 25 and can retain its properties to -40°F.

WINDOWS: Triple pane large polycarbonate vision panels are standard and are available in four sizes.

HINGE: Eliason Easy Swing® Hinge System.

OPTIONS: Push plates, Easy Spring bumpers, and jamb guards.

GASKETING: Replaceable perimeter edge gasketing.

Available Colors:



Color shown may differ from actual color. Consult factory for exact color match.



Over 60 Years Strong • www.eliasoncorp.com • (800) 828-3655



9229 SHAVER ROAD, KALAMAZOO, MI 49024 • FAX (800) 828-3577