

THE ELIASON® RMR-1500

The New RMR-1500 is Innovative, Durable and Practical.



RMR-1500 TRAFFIC DOOR

The RMR-1500 double acting traffic door is the latest innovation from Eliason Corporation and combines two great pieces of technology into one very tough and attractive door. The 1.5" thick monolithic door panel is rotationally molded high density cross-linked polyethylene (XLPE) with an outer skin thickness of .125" and the core is foamed-in-place with CFC-free urethane foam, which provides excellent insulation properties. But that's not the best part. This attractive and durable door panel operates on the time-tested Eliason Easy Swing hinge system, which is easy to install, requires virtually no maintenance and meets ADA requirements for passage. With all of these outstanding features, the RMR-1500 is the easy choice for your retail, walk-in cooler and light industrial applications.




Eliason RMR-1500 Doors

product features
& specifications

Quality Engineering Proven Over Time

- The engineers at Eliason have combined the best attributes of a lightweight, monolithic door panel with the benefits of the Easy Swing Hinge system. The result is a durable, attractive door panel that is easy to open, closes automatically, possesses outstanding insulating characteristics, requires virtually no maintenance and is ADA compliant.
- The RMR-1500 is tough enough to withstand the abuse of personnel, carts, manual and motorized pallet jacks and occasional low speed forklift traffic. This heavy duty door is design to comply with all USDA sanitation requirements.
- Your investment in the Eliason RMR-1500 brings you the most significant development to hit the double-acting traffic door industry in years. You can count on the RMR-1500 to provide years of trouble-free service. After all, it has the Eliason name and the industry's best warranty behind it.
- Like all Eliason double-acting traffic doors, the RMR-1500 is backed by our industry-best warranty against defects in materials and workmanship.

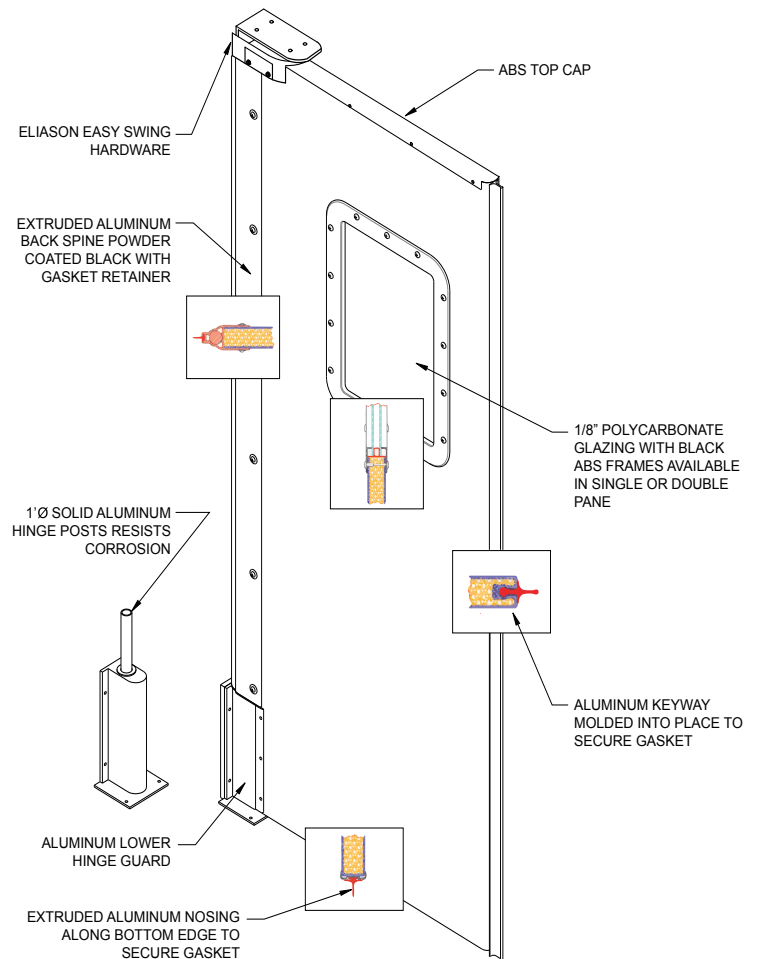

Specifications

DOOR BODY: Rotationally molded, high density cross-linked polyethylene (XLPE) monolithic door panel with CFC-free foam core and full perimeter gaskets. 1.5" total door thickness. Polyethylene door skin is .125" thick.

WINDOWS: high-impact polycarbonate set in two-piece black molded windows frame.

HINGES: Eliason Easy Swing Hinging System.

JAMB GUARDS: Aluminum Lower Hinge Guard

Available Colors:



Over 60 Years Strong • www.eliasoncorp.com • (800) 828-3655



9229 SHAVER ROAD, KALAMAZOO, MI 49024 • FAX (800) 828-3577