

THE ELIASON® RMR-9000

The Best Choice for Interior Corrosive Applications.



RMR-9000 CORROSION RESISTANT DOOR

The Eliason RMR-9000 door is ideally suited for use in interior applications that require durability and corrosion resistance. The RMR-9000 combines a .125" thick rotationally molded LLDPE shell and Non-CFC urethane core to create a seamless panel that is impervious to acids, petroleum products, animal fats and cleaning solvents. The RMR-9000 is environmentally friendly, never needs to be painted and cleans easily with soap and water. Every door is custom manufactured and can be ordered with a variety of options including windows, passage/locksets, door closers, panic devices, astragals, louvers, kickplates and weather-stripping.




ELIASON®

Eliason RMR-9000 Doors

product features
& specifications

Quality Engineering Proven Over Time

- The RMR-9000 features a one-piece rotationally molded LLDPE polyethylene outer shell and Eco-Mate Non-CFC urethane foam core. The seamless panel construction makes this door ideal for washdown applications and it holds up flawlessly to caustic substances.
- The outer surface of the RMR-9000 is .125" LLDPE polyethylene, making it the best moisture and corrosion resistant door on the market.
- All doors come standard with a replaceable bottom sweep, and are available with a drop down seal.
- Both pultruded fiberglass frames and stainless steel frames are available for the Eliason RMR-9000 door system. Either frame can be butt mounted or wrapped for most wall conditions. The frames are available with a variety of mounting systems.

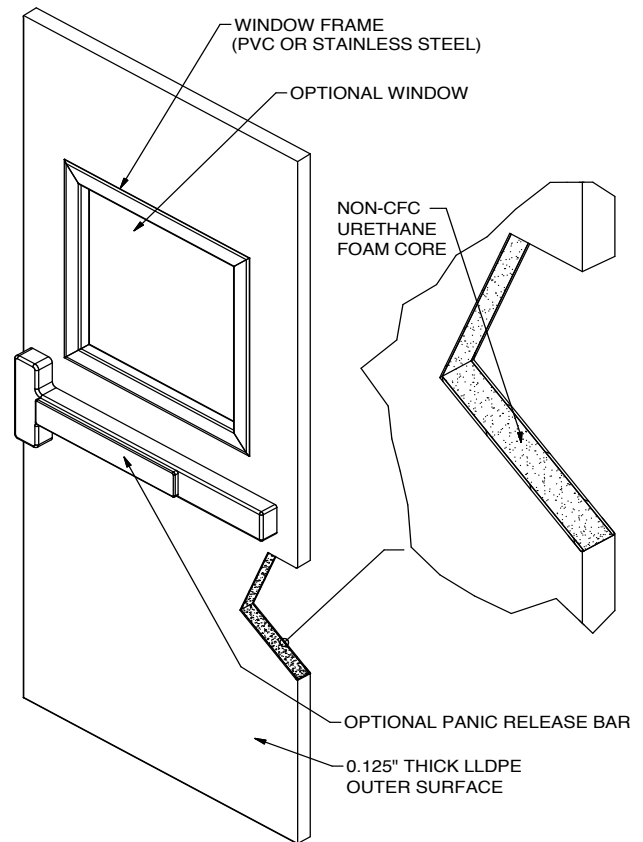

Specifications

DOOR BODY: The RMR-9000 features a one-piece rotationally molded LLDPE polyethylene outer shell and Non-CFC urethane foam core. The overall thickness is 1.75", yet weighs only 3.66 pounds per square foot. The panel can retain its properties from 30°F. to 100°F. continuous service and 140°F. intermittent service with temperature differences of up to 40°F.

FINISH: .125" thick monolithic rotationally molded LLDPE polyethylene available in 14 colors.

INSULATION: The RMR-9000 offers excellent insulation properties and the EcoMate foamed in place core is formulated to be environmentally friendly.

HINGES: Optional high quality 4-1/2" x 4-1/2" stainless hinges, continuous hinges, hospital hinges and other speciality hinges are available. The hinge location can be set to custom locations or match any manufacturer's location.

OPTIONS: Available with optional windows, passage/locksets, door closers, panic devices, push/pull handles, kick plates, louvers, astragals, flush bolts, bottom sweeps and weather stripping.

Available Colors:

		Metallic Gray	Black
Cloud Gray	Beige	Medium Brown	Burgundy
Chocolate Brown	Jade	Forest Green	Red
Navy	Royal Blue	Cadet Blue	White



Over 60 Years Strong • www.eliasoncorp.com • (800) 828-3655



9229 SHAVER ROAD, KALAMAZOO, MI 49024 • FAX (800) 828-3577