

THE ELIASON® SR-9000

The Perfect Fit for Large Retail Openings
and Light Industrial Applications.



SR-9000 IMPACT TRAFFIC DOOR

The Eliason SR-9000 door is custom manufactured to fit your opening and is a perfect fit for applications where heavy pallet jack or light forklift traffic is present. The SR-9000 door combines a reinforced internal steel frame with an extruded PVC outer frame and impact-resistant ABS cladding, making it one of the toughest and most durable doors available. SR-9000 doors operate on the Eliason V-Cam hinging system with ductile iron hinge posts and V-Cam and permanently sealed roller bearings.




ELIASON®

Eliason SR-9000 Doors

product features
& specifications

The Perfect Fit for Heavy Duty Applications

- The SR-9000 features a heavy duty reinforced internal steel frame combined with a full perimeter extruded PVC exterior frame to ensure panel strength and integrity.
- SR-9000 door panels are clad with .100" thick impact-resistant ABS thermoplastic, providing a tough, durable, moisture resistant exterior.
- SR-9000 doors feature heavy duty ductile iron V-Cams, ductile iron upper and lower hinge posts, and permanently sealed roller bearings. The result is smooth operation, strength and reliability.
- The SR-9000 is available with optional spring assist for high draft applications, aluminum or steel lower hinge guards, 180 degree V-Cam hardware and Easy Spring Bumpers.
- CFC-Free urethane foam core provides excellent thermal and sound abatement properties.

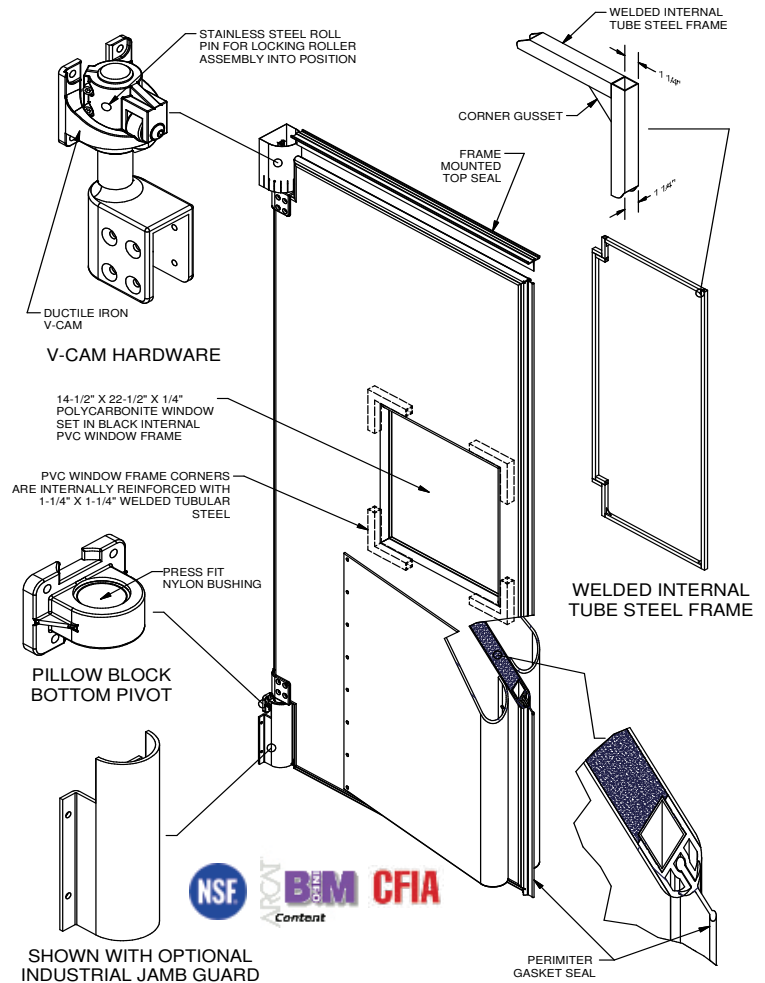

Specifications

DOOR BODY: Full perimeter heavy duty welded internal steel frame, reinforced at all corners with 1/4" thick welded steel gussets. The internal steel frame is covered with a tough extruded PVC external frame. Impact-resistant ABS thermoplastic cladding is bonded to the external PVC frame and the door is foamed in place with CFC-Free urethane foam for excellent thermal and sound abatement properties. Gasket seals are provided on the vertical and bottom edges of the door panel along with a frame mounted top seal.

FINISH: .100" thick impact-resistant ABS thermoplastic.

HINGES: Heavy duty ductile iron V-Cams with nylon bushings, ductile iron upper and lower hinge posts, ductile iron lower pillow block with nylon bushing and permanently sealed roller bearings.

WINDOWS: Impact-resistant polycarbonate vision panel set in sealed internal rigid PVC frame and internally reinforced with 1-1/4" welded square steel tubing. Standard size is 14-1/2" x 22-1/2". Consult factory for additional size options.

OPTIONS: Available with optional Easy Spring Bumpers, aluminum or steel jamb guards, spring assist and 180 degree V-Cam hinges.

Available Colors:

		Metallic Gray	Navy
Cloud Gray	Beige	Medium Brown	Royal Blue
Chocolate Brown	Antique White	Forest Green	Cadet Blue
Black	Red	White	



Over 60 Years Strong • www.eliasoncorp.com • (800) 828-3655



9229 SHAVER ROAD, KALAMAZOO, MI 49024 • FAX (800) 828-3577