

SPEC SHEET P-11 PLUS

Quote/Order# _____

Company Name: _____

Attention: _____


Email: _____

Phone#: _____

Job Name: _____

PAIR

SINGLE

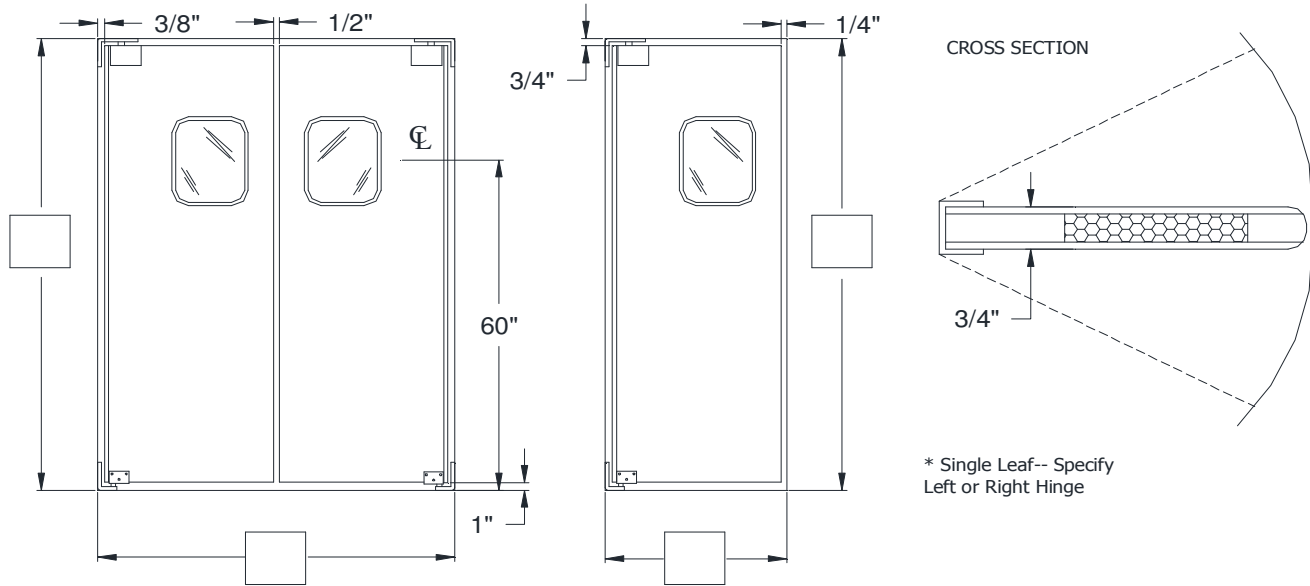

Fill in Opening Size in the Blanks Provided Above

STANDARD SPECIFICATIONS: Door body consists of 1/2" thick (Expanded PVC material) Inner Frame with Honeycomb Core; high impact exterior thermoplastic surface with a textured finish bonded to both sides. Galvanized steel, powder coated black, back channel. 14" x 16" clear acrylic window set in black rubber molding. Door assembly includes the original "NO SPRING" Easy Swing® hinges and both 1/4" - 20 x 1" thread cutting screws and #14 -1-1/2" sheet metal/wood screws for jamb by others.

INSTALLATION DETAILS: Jambs must be plumb and square. Minimum double 2 x 4 inch wood construction or equivalent. Hollow metal jambs should be reinforced at hinge locations.

SPECIFIC DETAILS FOR DOOR CONSTRUCTION:

DOOR COLOR: [] Forest Green [] Cadet Blue [] White [] Metallic Gray [] Cloud Gray [] Antique White
 [] Chocolate Brown [] Red [] Medium Brown [] Royal Blue [] Navy [] Black [] Beige
 [] Off White [] Fudge Brown [] Gray

WINDOW: [] Standard 14" X 16" In Black Rubber Molding, Up 60" to Center of Window from Floor
 [] Other: _____

JAMB GUARD: [] 3" X 9" [] 5" X 18"

PLATE: Specify Height: _____
 Color/Material: [] Black [] Same Color As Door [] Stainless Steel [] Other _____

BUMPER: Standard Black Tear Drop Polyethylene Height: [] 12 [] 18 [] 24 [] 30 [] 36 [] 42
 Aluminum Bumper Strip: []

OTHER SPECIFICATIONS: _____

APPROVED BY: _____

DATE: _____

Eliason Corporation