


INSTALLATION INSTRUCTIONS & PART DIAGRAM

Eliason® *Easy Swing*® Double Action Doors

PE-500 / PG-500

GASKETS ON THE
150-118G2 ONLY



JAMB MUST BE SQUARE AND PLUMB
A MINIMUM OF 3-1/2 INCH WIDE JAMBS
REQUIRED TO MOUNT HARDWARE

1. Measure width and height of framed opening and compare width dimensions given at time of ordering. (This model was cut to the dimensions given by the customer and is not adaptable to fit into a different size opening.)

2. Position bottom pin assembly on floor and center on side jamb. Secure to jamb using (4) 1-1/2" screws supplied. Bottom pin must be secured to floor using (2) 3/8" X 2-1/4" floor anchors supplied. Top pin assembly secures to top with (4) screws and side jamb with (2) screws supplied.


3. If a jamb guard is supplied, refer to the installation instructions supplied with the jamb guard.

4. (If door is **NOT** gasketed skip to step 6) Clean jamb to remove any grease and oils, allow to dry.

5. Using two-sided tape supplied with the jamb wiper gasket, attach the jamb wiper gasket along center of jamb and between top and bottom pin assemblies (or top pin and jamb guard if supplied), press down firmly throughout the center of gasket to ensure adhesion.

6. Slip door over bottom pin and lift slightly to slide door pod over bearing plate. Line up holes and insert bolts supplied. Partially install lock nuts, move door to closed position and secure lock nuts.

7. Install covers and secure (4) 1/2" screws supplied per door.

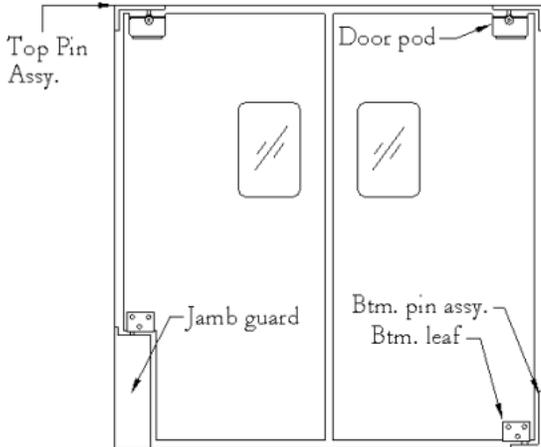

NOTE: Bottom pin assembly must be secured to floor.

NOTE: HOLLOW METAL JAMBS DRILL 7/32 PILOT HOLE FOR 9GA. AND THINNER MATERIAL

150-118 - Top Pin Assy (SCP, PMP, HCP, P-11+, PE)

OR
150-118G2 - Top Pin Assy (PG)

(6) 1/4" - 20 x 1" phil. flt hd. thread cutting screws

(6) #14 - 1-1/2" phil. flt hd. sheet metal / wood screws

100-50 - Bearing Plate with (2) 5/16 - 18 screws, (2) 5/16 - 18 lock nuts

170-58 - 3/8" Axle

170-60 - (2) Rollers

170-28 - (2) Kliprings


170-74-XX - Jamb Wiper Gasket (PG-500 Only)

170-18208 - (2) Black ABS Covers, (4) screws (HCP/G, HFG, PMP, P11+, PE/G)

150-54 - Bottom Pin Assy (4) of each fastener listed under

OR
150-54G2 - Bottom Pin Assy (4) of each fastener listed under
150-118 or 150-118G2 & (2) floor anchors

(150-54 or 150-54G2 **NOT** included if 3" x 9" jamb guard is used)

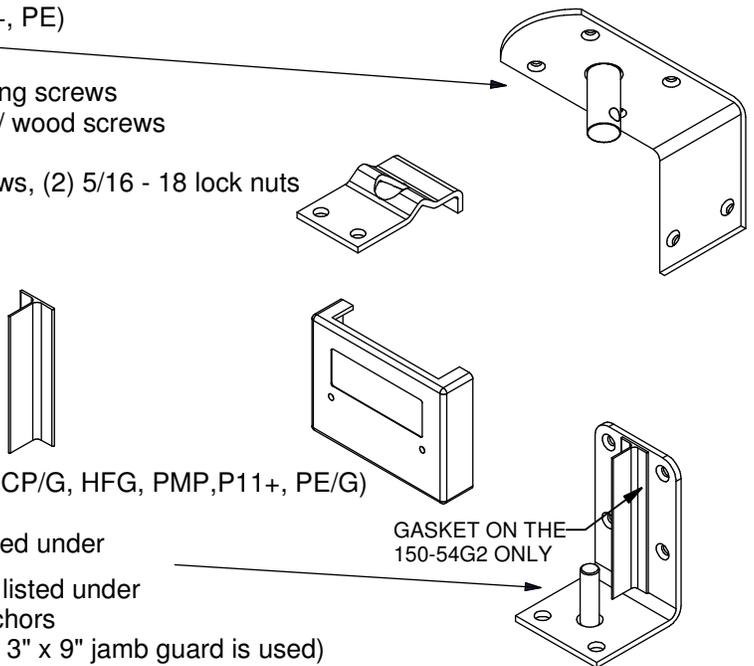

ELIASON
CORPORATION

www.eliasoncorp.com

9229 Shaver rd., Kalamazoo, MI 49003

Telephone: 269-327-7003 / 800-828-3655

Fax: 269-327-7006 / 800-828-3577

E-mail: doors@eliasoncorp.com