

# SPEC SHEET SCP-5

Quote/Order# \_\_\_\_\_


Company Name: \_\_\_\_\_

Attention: \_\_\_\_\_

Email: \_\_\_\_\_

Phone#: \_\_\_\_\_

Job Name: \_\_\_\_\_

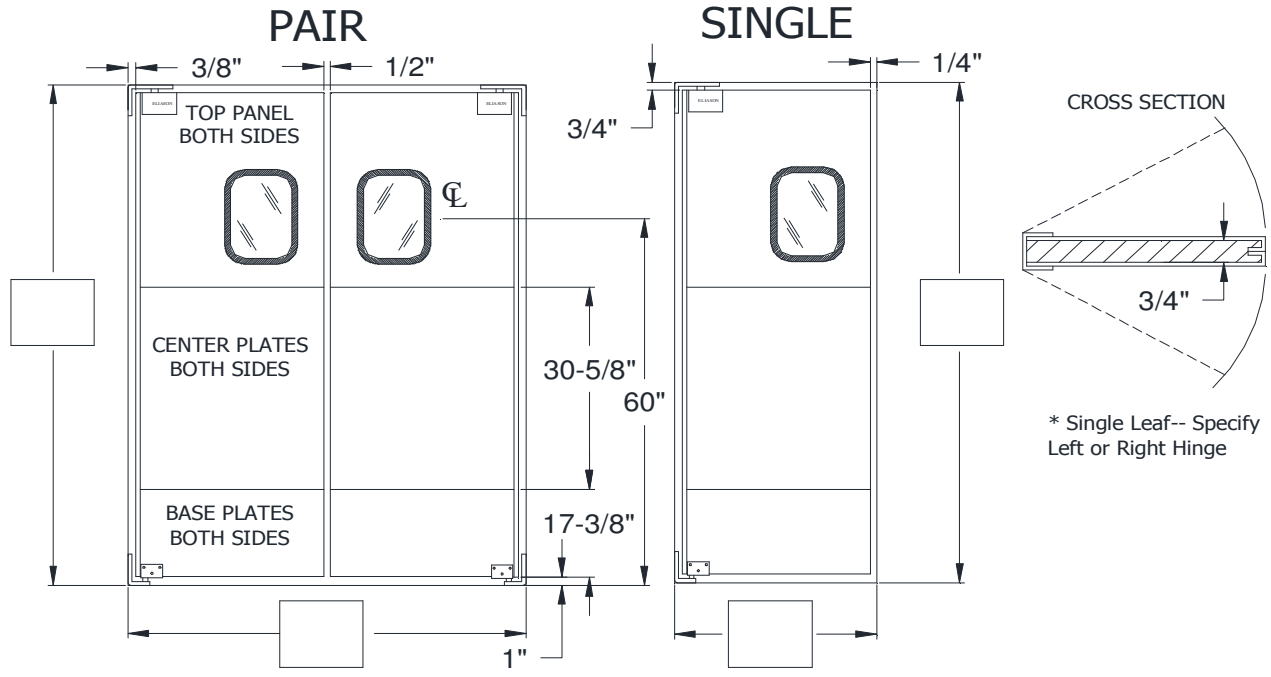

**Fill in Opening Size in the Blanks Provided Above**

**STANDARD SPECIFICATIONS:** Door body 3/4" exterior grade solid wood core, metal clad. 17-3/8" high structural quality, grade D, mill galvanized steel base plates, both sides. 30-5/8" high center plates - stainless steel front, galvanized steel rear. 0.032" tempered aluminum alloy with satin anodized finish top panels, both sides. 9" x 14" clear acrylic safety window set in black rubber molding. Door assembly includes the original "NO SPRING" Easy Swing® hinges and both 1/4" - 20 x 1" thread cutting screws and #14 -1-1/2" sheet metal/wood screws for jamb by others.

**INSTALLATION DETAILS:** Jambs must be plumb and square. Minimum double 2 x 4 inch wood construction or equivalent. Hollow metal jambs should be reinforced at hinge locations.

**SPECIFIC DETAILS FOR DOOR CONSTRUCTION:**

JAMB GUARD: [ ] 3" X 9" [ ] 5" X 18"

WINDOW: [ ] Standard 9" X 14" In Black Rubber Molding, Up 60" to Center of Window from Floor  
 [ ] Other: \_\_\_\_\_

PLATES: [ ] Standard Plates [ ] Other Plates - Specify: \_\_\_\_\_

BUMPER: Standard Black Tear Drop Polyethylene, Height: [ ] 12 [ ] 18 [ ] 24 [ ] 30 [ ] 36 [ ] 42  
 Aluminum Bumper Strip: [ ]

OTHER SPECIFICATIONS: \_\_\_\_\_

APPROVED BY: \_\_\_\_\_

DATE: \_\_\_\_\_

**Eliaison Corporation**