

# SPEC SHEET SR8300

Quote/Order# \_\_\_\_\_


Company Name: \_\_\_\_\_

Attention: \_\_\_\_\_

Email: \_\_\_\_\_

Phone#: \_\_\_\_\_

Job Name: \_\_\_\_\_

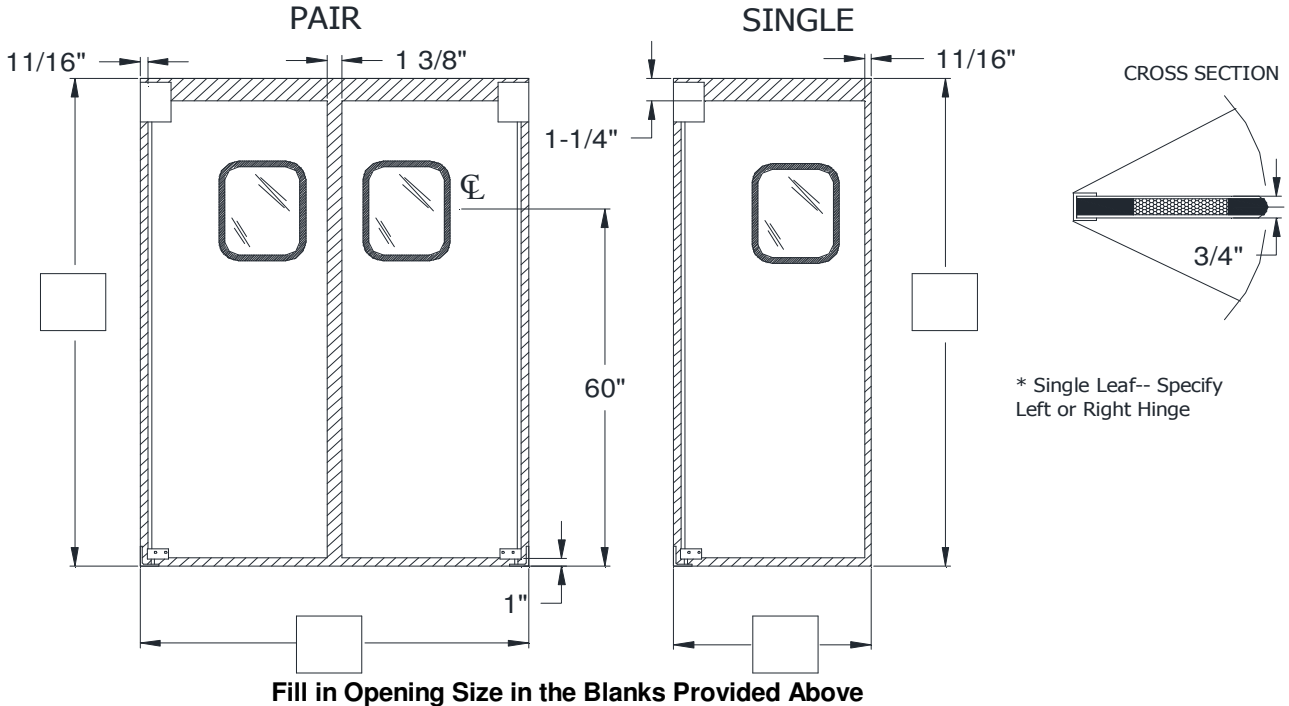

**STANDARD SPECIFICATIONS:** Door body consists of 1/2" thick Expanded PVC Inner Frame with Honeycomb Core; high impact exterior thermoplastic surface with a textured finish bonded to both sides (3/4" total door thickness). Galvanized steel, powder coated black, back channel. 14" x 16" clear acrylic window set in black rubber molding. Full perimeter gasket. Door assembly includes mid-rise V-cam hinges, bottom saddle, and bottom pin.

**INSTALLATION DETAILS:** Jambs must be plumb and square. Minimum double 2 x 4 inch wood construction or equivalent. Hollow metal jambs should be reinforced at hinge locations.

**SPECIFIC DETAILS FOR DOOR CONSTRUCTION:**

DOOR COLOR:  Forest Green  Cadet Blue  White  Metallic Gray  Cloud Gray  Antique White  
 Chocolate Brown  Red  Medium Brown  Royal Blue  Navy  Black  Beige  
 Off White  Fudge Brown  Gray

WINDOW:  Standard 14" X 16" In Black Rubber Molding, Up 60" to Center of Window from Floor  
 Other: \_\_\_\_\_

JAMB GUARD:  11" Polyethylene  11" Polyethylene With Floor Plate  6" Polyethylene  
 11" Aluminum  11" Aluminum With Floor Plate  6" Aluminum

PLATE: Specify Height: \_\_\_\_\_  
 Color/Material:  Black  Same Color As Door  Stainless Steel  Other \_\_\_\_\_

BUMPER: Standard Black Tear Drop Polyethylene Height:  12  18  24  30  36  42  
 Aluminum Bumper Strip:

OTHER SPECIFICATIONS: \_\_\_\_\_

APPROVED BY: \_\_\_\_\_

DATE: \_\_\_\_\_

**Eliason Corporation**