

SPEC SHEET SR8300

Quote/Order# _____


Company Name: _____

Attention: _____

Email: _____

Phone#: _____

Job Name: _____

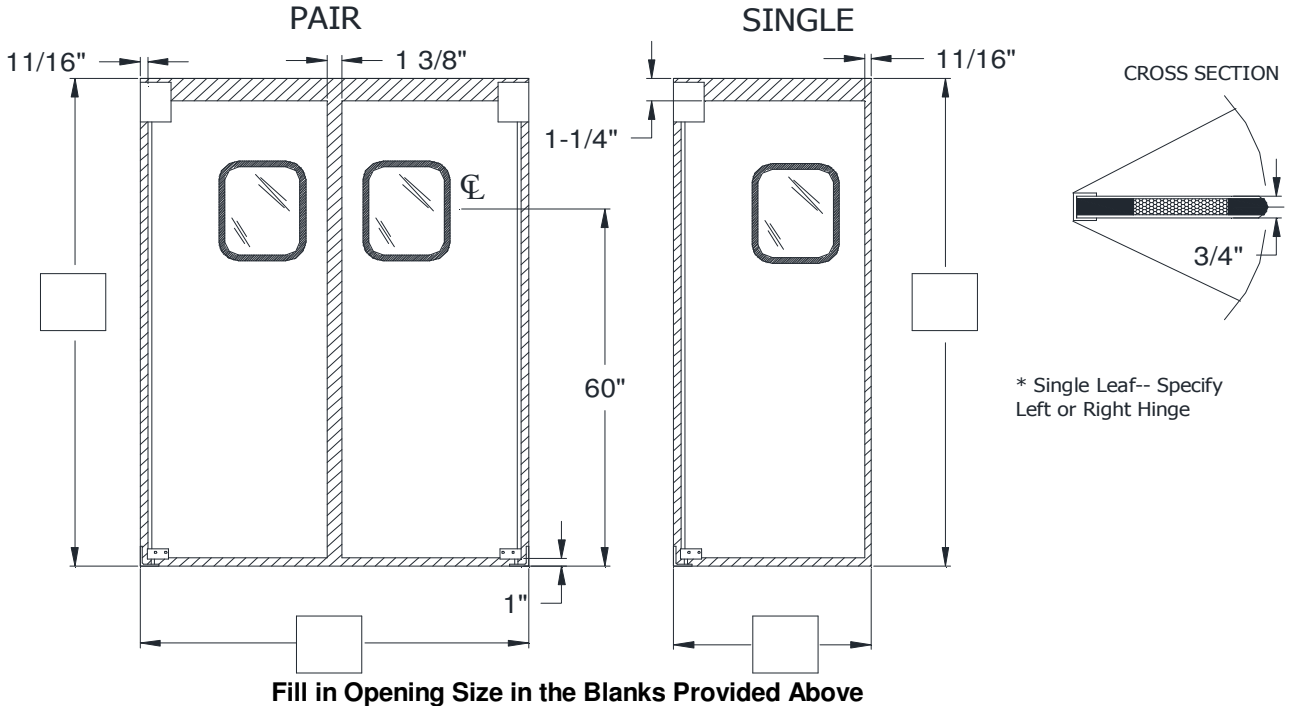

* Single Leaf-- Specify Left or Right Hinge

STANDARD SPECIFICATIONS: Door body consists of 1/2" thick Expanded PVC Inner Frame with Honeycomb Core; high impact exterior thermoplastic surface with a textured finish bonded to both sides (3/4" total door thickness). Galvanized steel, powder coated black, back channel. 14" x 16" clear acrylic window set in black rubber molding. Full perimeter gasket. Door assembly includes mid-rise V-cam hinges, bottom saddle, and bottom pin.

INSTALLATION DETAILS: Jambs must be plumb and square. Minimum double 2 x 4 inch wood construction or equivalent. Hollow metal jambs should be reinforced at hinge locations.

SPECIFIC DETAILS FOR DOOR CONSTRUCTION:

DOOR COLOR: Forest Green Cadet Blue White Metallic Gray Cloud Gray Antique White
 Chocolate Brown Red Medium Brown Royal Blue Navy Black Beige
 Off White Fudge Brown Gray

WINDOW: Standard 14" X 16" In Black Rubber Molding, Up 60" to Center of Window from Floor
 Other: _____

JAMB GUARD: 11" Polyethylene 11" Polyethylene With Floor Plate 6" Polyethylene
 11" Aluminum 11" Aluminum With Floor Plate 6" Aluminum

PLATE: Specify Height: _____
 Color/Material: Black Same Color As Door Stainless Steel Other _____

BUMPER: Standard Black Tear Drop Polyethylene Height: 12 18 24 30 36 42
 Aluminum Bumper Strip:

OTHER SPECIFICATIONS: _____

APPROVED BY: _____

DATE: _____

Eliason Corporation