

SPEC SHEET SR8300

Quote/Order# _____


Company Name: _____

Attention: _____

Email: _____

Phone#: _____

Job Name: _____

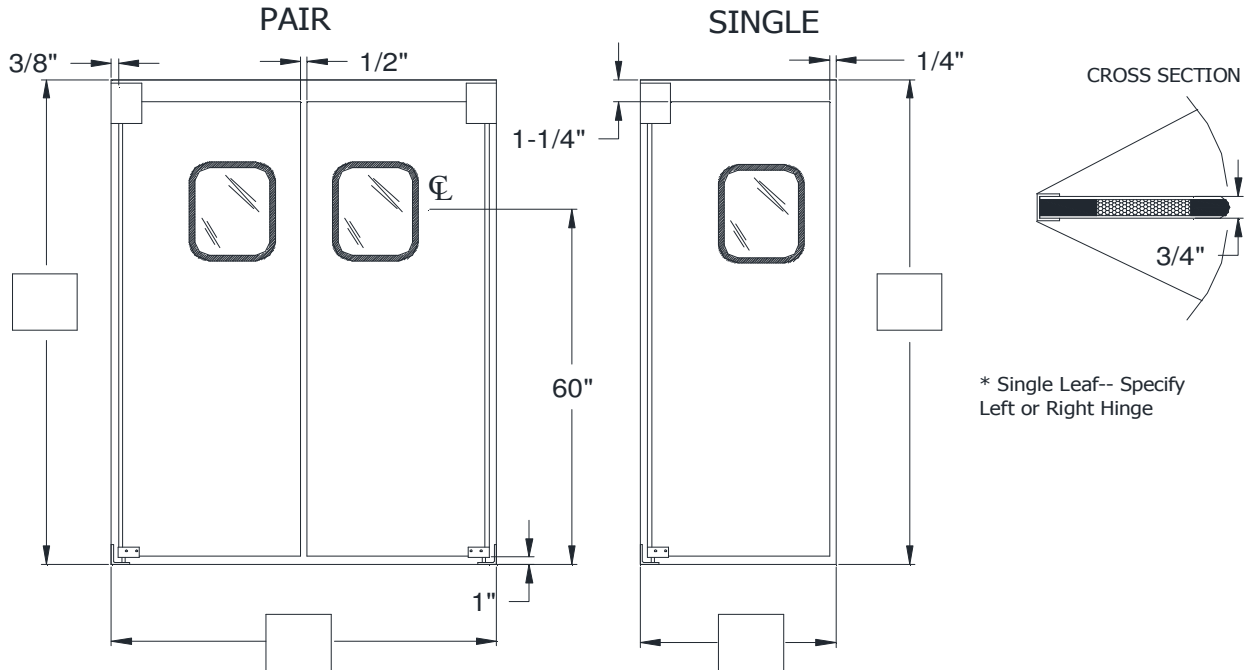

Fill in Opening Size in the Blanks Provided Above

STANDARD SPECIFICATIONS: Door body consists of 1/2" thick Expanded PVC Inner Frame with Honeycomb Core; high impact exterior thermoplastic surface with a textured finish bonded to both sides (3/4" total door thickness). Galvanized steel, powder coated black, back channel. 14" x 16" clear acrylic window set in black rubber molding. Door assembly includes mid-rise V-cam hinges, bottom saddle, and bottom pin.

INSTALLATION DETAILS: Jambs must be plumb and square. Minimum double 2 x 4 inch wood construction or equivalent. Hollow metal jambs should be reinforced at hinge locations.

SPECIFIC DETAILS FOR DOOR CONSTRUCTION:

DOOR COLOR: [] Forest Green [] Cadet Blue [] White [] Metallic Gray [] Cloud Gray [] Antique White
 [] Chocolate Brown [] Red [] Medium Brown [] Royal Blue [] Navy [] Black [] Beige
 [] Off White [] Fudge Brown [] Gray

WINDOW: [] Standard 14" X 16" In Black Rubber Molding, Up 60" to Center of Window from Floor
 [] Other: _____

JAMB GUARD: [] 11" Polyethylene [] 11" Polyethylene With Floor Plate [] 6" Polyethylene
 [] 11" Aluminum [] 11" Aluminum With Floor Plate [] 6" Aluminum

PLATE: Specify Height: _____
 Color/Material: [] Black [] Same Color As Door [] Stainless Steel [] Other _____

BUMPER: Standard Black Tear Drop Polyethylene Height: [] 12 [] 18 [] 24 [] 30 [] 36 [] 42
 Aluminum Bumper Strip: []

OTHER SPECIFICATIONS: _____

APPROVED BY: _____

DATE: _____

Eliason Corporation